

# FLP-12,5-075-VH/0


## SPD - for low voltage / SPD type 1 / Spare modules

Replacement module for FLP-12


- replacement module for FLP-12,5-075-VH/x



Product dimensions

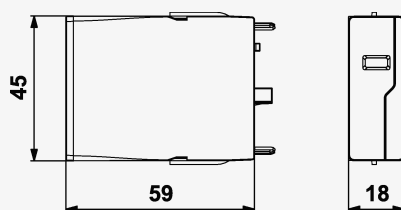

Basic circuit diagram



| Parameter name                             |            | Parameter value      |
|--------------------------------------------|------------|----------------------|
| Type of SPD                                |            | T1,T2                |
| Maximum operating voltage                  | $U_c$      | 75.00 V AC           |
| Maximum operating voltage                  | $U_c$      | 75.00 V DC           |
| Short-circuit current rating               | $I_{SCCR}$ | 25.0 kA              |
| Lightning impulse current (10/350 $\mu$ s) | $I_{imp}$  | 12.50 kA             |
| Nominal discharge current (8/20 $\mu$ s)   | $I_n$      | 20.00 kA             |
| Maximum discharge current (8/20 $\mu$ s)   | $I_{max}$  | 40.00 kA             |
| Voltage protection level                   | $U_p$      | 0.45 kV              |
| Response time                              | $t_a$      | 25 ns                |
| Fault indication                           |            | red indication field |
| ETIM Class                                 |            | EC000381             |
| Customs tariff number                      |            | 85363030             |
| EAN                                        |            | 8595090545712        |
| Order number                               |            | A04571               |