

FLP-ZP-7,5-VBH/0


SPD - for low voltage / SPD type 1 / Spare modules

Replacement module for FLP-ZP.-7


- replacement module for FLP-ZP.-7,5-VBH...



Product dimensions

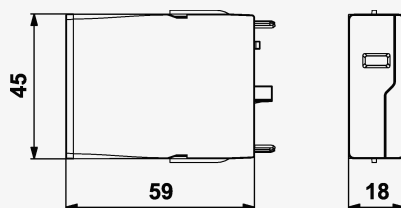

Basic circuit diagram



Parameter name		Parameter value
Type of SPD		T1,T2,T3
Maximum operating voltage	U_c	255.00 V AC
Short-circuit current rating	I_{SCCR}	25.0 kA
Lightning impulse current (10/350 μ s)	I_{imp}	7.50 kA
Nominal discharge current (8/20 μ s)	I_n	20.00 kA
Maximum discharge current (8/20 μ s)	I_{max}	60.00 kA
Test voltage	U_{oc}	10.0 kV
Voltage protection level	U_p	1.50 kV
Response time	t_a	100 ns
Fault indication		red indication field
According to standard		EN 61643-11:2012, IEC 61643-11:2011
ETIM Class		EC000941
Customs tariff number		85363090
EAN		8595090566298
Order number		A06629